


Narwhal SV-480 SOLAS Rescue Boats

... at the forefront
of survival
technology

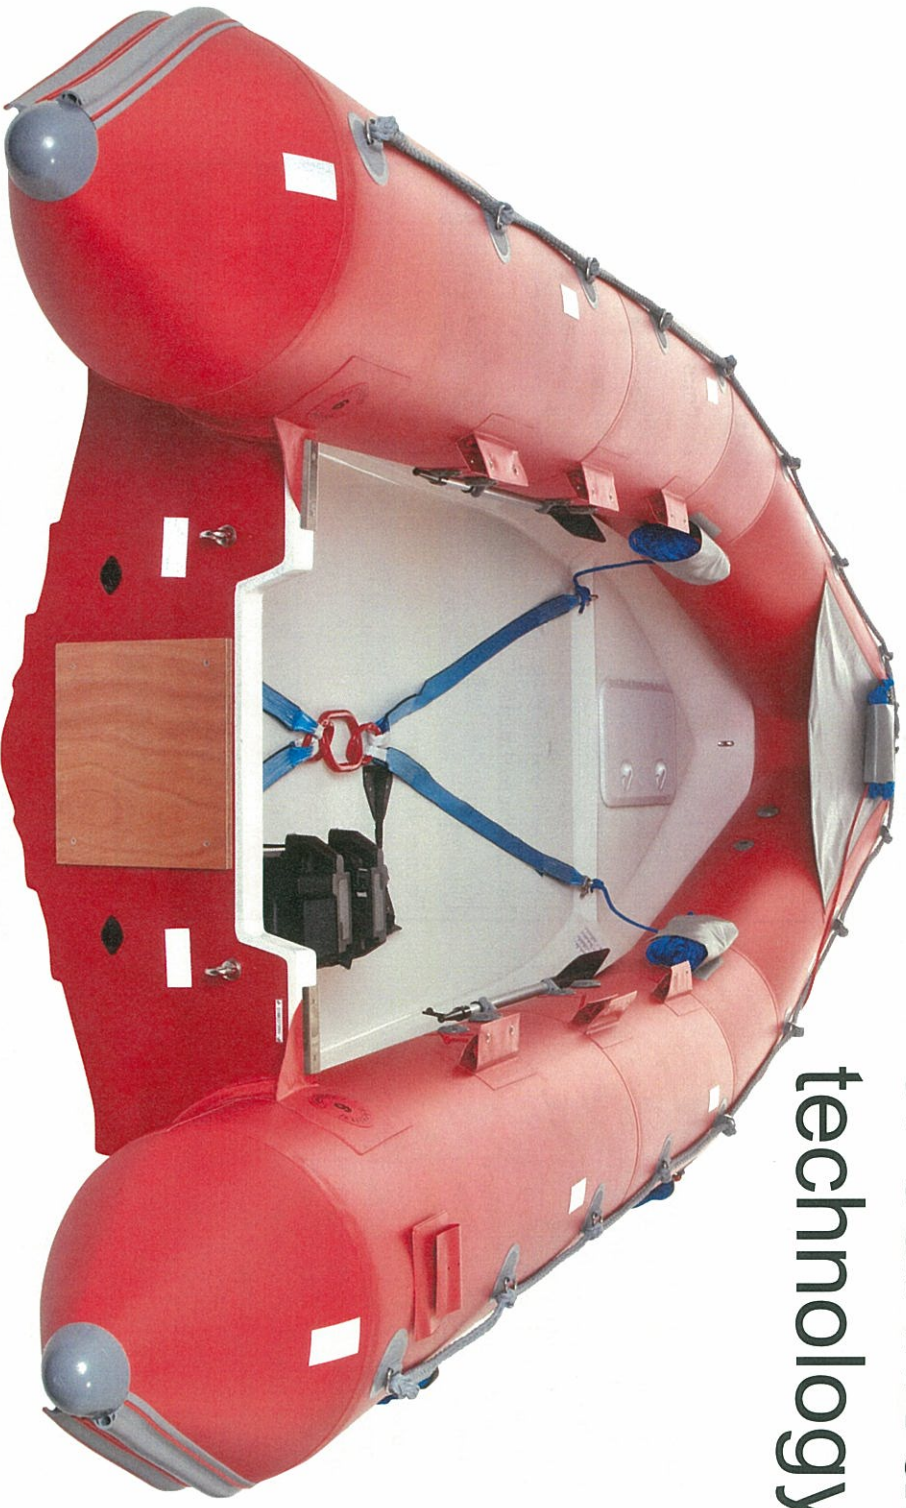

- Every single hull is injected with polyurethane making the hulls extremely resistant in the toughest of sea conditions
- Produced with high tenacity TRITEX® material, the buoyancy tubes withstand scratches and extreme temperatures between -30°C-+70°C
- All mechanical joints are high frequency welded

Narwhal SV-480 SOLAS Rescue Boats



Narwhal Boats have 50 years of manufacturing history. All Narwhal boats from 4m to 7.5m length have passed the required tests which guarantee the buoyancy and stability of the boat in extreme conditions, with maximum load and the most critical chamber of the boat in a deflated state. The certification society ICNN (Institute for the certification & normalization in a nautical field, France) verified and awarded unsinkable boat certificates to the range.



In compliance with SOLAS requirements, the SV-480 design allows for navigation via a driving console as well as with a traditional outboard engine and tiller. Approved for a 40HP-75HP engine, the driving position will allow for more ease of operation thereby improving the reaction time in case of an emergency.

The SV-480 easily accommodates the compulsory approved stretcher on board and also has transverse passenger seats and a bow locker for storage of all equipment.

Narwhal SV-480	
Overall length	4800mm
Inside length	3540mm
Overall beam	2140mm
Inside beam	1100mm
Maximum depth	1000mm
Maximum diameter	510mm
No. of compartments	5 + 1
Engine size	40/50/60 or 75CV
Engine shaft type	Long
Maximum authorised payload	690kg
Boat weight	250kg
Approximate fully laden weight	940kg
Maximum authorised no. of persons	6
UNE-EN ISO 9001 QULITY NO. 2389-2005-AQ-BAR-ENAC	
CERTIFIED NO. MED-B-45001 DNV 0575/08	

EQUIPMENT & INHERENT DESIGN CHARACTERISTICS

- Fully reinforced rubstrake
- Automatic relief valves
- Reinforced inflation/deflation valves
- Equipment locker
- Battery fastening system
- Ring with throw line
- Float quoit line holder set
- Lifting rings
- Mooring/Towing rings
- Line Holder
- Aluminium in-transom reinforced plate
- Reflective tape
- Righting labels
- Righting line holder
- Righting line ring
- Towing rings
- Hull draining valve
- Deck draining valve
- Wooden out-transom reinforced plate
- Fitting for positioning light
- Paddle/boat hook
- Retainers for fuel tank
- Foldable benches

